

Wheel Refacer 250

TABER[®]
INDUSTRIES
ISO 9001 REGISTERED


Taber[®] Abraser Wheel Resurfacing

Resurface Taber abrading wheels with precision.

The Model 250 Wheel Refacer is recommended to refresh the contact surfaces of Calibrade[®] wheels. This instrument can also be used to true out of round wheels and correct 'crowning' conditions on both Calibrase[®] and Calibrade[®] wheels.

Rugged design is built to last.

The refacing diamond is mounted in an adjustable diamond tool holder, which is supported on a shielded traverse slide. Abrading wheels are mounted on a flanged extension of the motor shaft. A durable, cast housing provides ample weight to prevent chatter during operation. Attaching the Taber Abraser vacuum unit hose to the rear receptacle draws off abrasive cuttings.



Wheel Refacer 250


Taber® Abraser Wheel Resurfacing

Standard Features:

Hinged wheel guard with safety off sensor
Plugs into accessory receptacle on Taber Rotary Abraser
Replaceable diamond tools
Shielded traverse slide
Feed screw crank
CE

Available Accessories:


Single Point Diamond Tool
Multiple Point Diamond Tool (use for H-38 wheels)

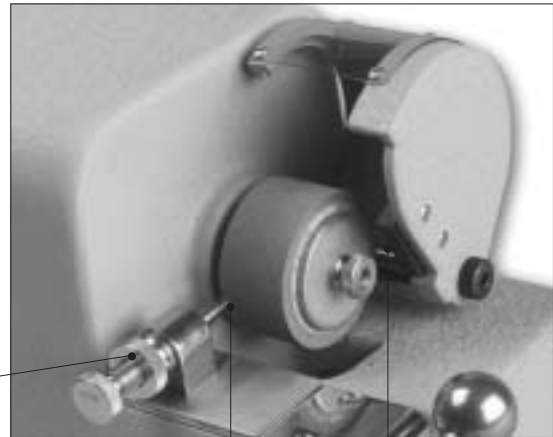

Lock Nut

Diamond Tool

Safety off Sensor

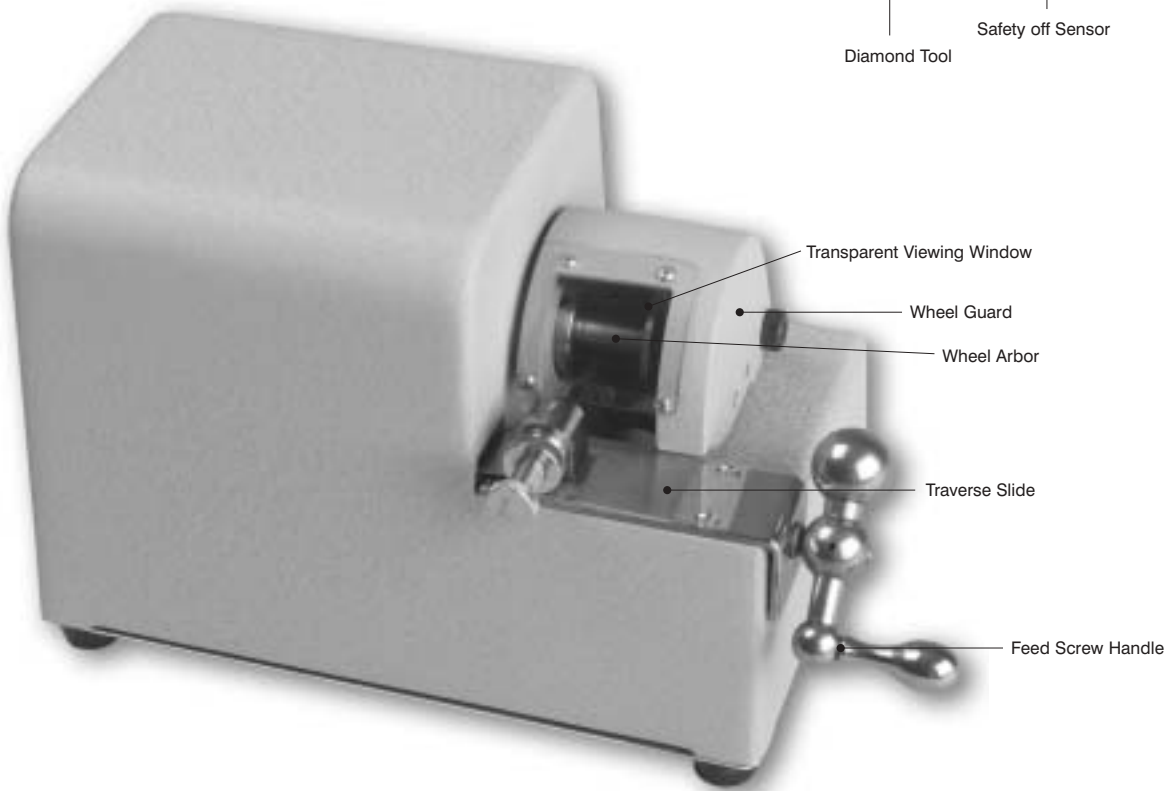

Transparent Viewing Window

Wheel Guard

Wheel Arbor

Traverse Slide

Feed Screw Handle

TABER
INDUSTRIES

Setting the Industry Standard

CCSi, Inc.
Akron, Ohio 44301-1356 USA

For more information:
Call 800.742.8535 (U.S.) or 330.376.3600 (outside U.S.)
Fax 330.376.8500
Email us at taber@ccsi-inc.com
Visit us at <http://www.ccsi-inc.com>